


Accessories / Zubehör / Accessoires:

| | | |
|--|--|--|
| | | |
| | | |

Technical specifications / Technische Spezifikationen / Technische specificaties:

| | | | ASC3007 | ASC3007/1ph |
|----------------|---------------|---------------|------------------------------------|-------------------------|
| Capacity | Tragfähigkeit | Hefvermogen | 3.000 kg | 2.500 kg |
| Lifting time | Hebezeit | Heftijd | 75 s | 75 s |
| Descent time | Absenkzeit | Daaltijd | 45 s | 45 s |
| Noise level | Lärmpegel | Geluidsniveau | 74 dB (A) / 1 m | 74 dB (A) / 1 m |
| Working temp. | Arbeitstemp. | Werktemp. | -10 °C / +50 °C | -10 °C / +50 °C |
| Motor power | Motorleistung | Motorvermogen | 3 kW | 3 kW |
| Electr. Supply | Anschlußwert | Aansl. waarde | 230/400V / 50Hz/ 3 Ph 12,6/7,4A | 230V / 50Hz/ 1 Ph 17,6A |
| Color | Farbe | Kleur | RAL 5015 | RAL 5015 |
| Working envir. | Arbeitsumgeb. | Werkomgeving | Indoor/Drinnen/Binnen | Indoor/Drinnen/Binnen |
| CE number | CE Nummer | CE nummer | 0062-150X-0345-05-05 | 0062-150X-0345-05-05 |
| Notified body | Notified body | Notified body | Bureau Veritas | Bureau Veritas |

Packing/Verpackung/Verpakking:

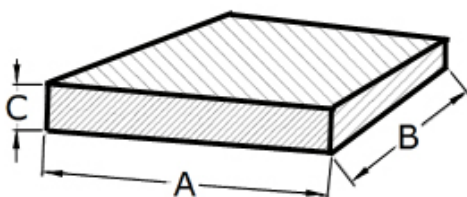

A = 2180
B = 670
C = 300



Container transport:



20 ft. = 40 pieces/Stück/stuks